

# DURACELL®

Effective January 1, 2024

Supersedes all previous information. Subject to change without notice




LYON STATION, PA - PHONE: 610-682-6361 - Fax: 610-682-4781

[WWW.DRIVEDURACELL.COM](http://WWW.DRIVEDURACELL.COM)

## USA

GROUP NO.	PART NO.	CCA	R.C.	REF. CA	20 HR CAP.	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES
							LENGTH		WIDTH		HEIGHT				
							in	mm	in	mm	in	mm			
<b>DURACELL PLATINUM AGM 12-VOLT AUTO / LTV — 36 MONTH FREE REPLACEMENT — 36 MONTH ROADSIDE ASSISTANCE</b>															
47 (H5/L2)	AGM47	600	100	690	60	39	9-9/16	242	6-7/8	175	7-1/2	190	1.0	36	17,22,38,39,46
48 (H6/L3)	AGM48	760	120	875	70	47.5	11	278	6-7/8	175	7-1/2	190	1.0	36	17,22,46
49 (H8/L5)	AGM49	850	170	975	92	58	13-15/16	354	6-7/8	175	7-1/2	190	1.0	36	17,22,38,39,46
S46B24R (PRIUS)	AGM51P	325	60	390	46	29.5	9-1/4	235	5	127	8-5/8	220	1.0	36	22,38,39,46,J
51R	AGM51RT	500	75	580	46	31.5	9-5/16	236	5	127	8-5/8	219	1.0	36	2,38,39,46
94R (H7/L4)	AGM94R	800	140	920	80	52	12-7/16	315	6-7/8	175	7-1/2	190	1.0	36	17,22,38,39,46
95R (H9/L6)	AGM95R	950	190	1050	105	65	15-1/2	394	6-7/8	175	7-1/2	190	1.0	36	17,22,24,38,39,46
140R (H4/LN1)	AGM140R	535	80	615	50	34	8-1/8	207	6-7/8	175	7-1/2	190	1.0	36	17,22,38,39,46
<b>DURACELL PLATINUM AGM — 12 MONTH FREE REPLACEMENT</b>															
401	AUX12	180	—	—	10	9.5	5-7/8	150	3-7/16	88	5-1/8	130	0.2	12	K
400	AUX14	200	—	—	12	11.5	5-7/8	150	3-7/16	88	5-3/4	145	0.2	12	38,39,K
AUX	AUX18L	300	—	—	20	18	8-1/8	206	3-9/16	91	6-3/8	163	0.2	12	38,39,K
GROUP NO.	PART NO.	CCA	R.C.	REF. CA	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES	
						LENGTH		WIDTH		HEIGHT					
						in	mm	in	mm	in	mm				
<b>DURACELL PREMIUM 12-VOLT AUTO / LTV — 36 MONTH FREE REPLACEMENT — 36 MONTH ROADSIDE ASSISTANCE</b>															
24	P24	650	115	800	39.5	10-3/4	273	6-3/4	171	9	229	1.0	36	17,22,45	
24F	P24F	725	120	890	42.5	10-3/4	273	6-3/4	171	9	229	1.0	36	17,22,45	
25	P25	625	95	770	37	9-3/4	248	6-7/8	175	8-7/8	225	1.0	36	17,22,45	
27	P27	840	140	1035	50.5	12-5/8	321	6-3/4	171	9	229	1.0	36	17,21,45	
27F	P27F	840	140	1035	50.5	12-5/8	321	6-3/4	171	9	229	1.0	36	17,21,45	
34	P34	800	115	985	40	10-3/4	273	6-7/8	175	8	203	1.0	36	17,18,22,28,45	
35	P35	640	95	785	37	9-9/16	247	6-7/8	175	8-7/8	225	1.0	36	17,22,45	
36R	P36R	650	120	800	38	10-1/4	260	7-1/4	184	8	203	1.0	36	45	
40R (T6/LB3)	P40R	650	105	800	37	11	278	6-7/8	175	6-7/8	175	1.0	36	17,22,45	
47 (H5/L2)	P47	650	100	800	35.5	9-9/16	242	6-7/8	175	7-1/2	190	1.0	36	17,22,45	
48 (H6/L3)	P48	730	120	900	41.5	11	278	6-7/8	175	7-1/2	190	1.0	36	17,22,45	
49 (H8/L5)	P49	900	185	1105	52.5	13-15/16	354	6-7/8	175	7-1/2	190	1.0	36	17,22,45	
51	P51	450	70	555	28	9-3/8	238	5	127	8-3/4	222	1.0	36	22,45	
51R	P51R	500	75	615	28.5	9-3/8	238	5	127	8-3/4	222	1.0	36	22,45	
58	P58	580	85	715	32	10	254	7-1/4	184	6-7/8	178	1.0	36	17,22,45	
58R	P58R	580	85	715	32	10	254	7-1/4	184	6-7/8	175	1.0	36	17,22,45	
59	P59	590	100	725	38.5	9-1/2	241	7-7/16	189	7-1/2	190	1.0	36	17,45	
65	P65	850	150	1045	46.5	12	305	7-3/8	187	7-5/8	194	1.0	36	17,22,45	
75	P75	690	95	850	35	9-3/4	248	7	178	7-1/4	184	1.0	36	17,22,45,E	
78	P78	800	115	985	40	10-3/4	273	6-7/8	175	7-1/4	184	1.0	36	17,22,45,E	
86	P86	690	95	850	35	9	229	6-7/8	175	8-1/8	206	1.0	36	22,45	
90 (T5/LB2)	P90	600	90	740	33.5	9-9/16	242	6-7/8	175	6-7/8	175	1.0	36	17,22,45	
94R (H7/L4)	P94R	790	140	970	45.5	12-7/16	315	6-7/8	175	7-1/2	190	1.0	36	17,22,45	
96R	P96R	600	90	740	32.5	9-9/16	242	6-7/8	175	6-7/8	175	1.0	36	17,22,45	
121R	P121R	550	80	675	30.5	8-1/4	210	6-15/16	177	8-1/8	206	1.0	36	22,45	
124R	P124R	700	100	860	37.5	10-1/4	260	6-7/8	175	8-3/8	212	1.0	36	22,45	
<b>DURACELL PREMIUM 12-VOLT HEAVY-DUTY COMMERCIAL SERVICE</b>															
4D	HP4D	1050	290	1290	97	20-1/2	520	8-5/8	219	9-7/8	251	3.0	12	12,17,21,22	
4DLT	HP4DLT	850	240	1045	78.5	20	508	8-1/8	206	8-1/8	206	2.0	12	12,19,25	
8D	HP8DFT	1425	440	1755	127	20-3/4	527	11	279	10	254	4.0	12	12,17,21,22	
31	D31X	950	175	1170	55.5	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22,X	
	HP31CS	730	190	900	62	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22,43,X	
<b>DURACELL PREMIUM AGM 12-VOLT HEAVY-DUTY COMMERCIAL SERVICE</b>															
31	AGM31F	925	190	1050	66.5	13	330	6-3/4	171	9-1/2	241	1.5	36	2,17,33,38,39,43,X	
<b>DURACELL PREMIUM 12-VOLT LAWN MOWER — GARDEN TRACTOR — SMALL ENGINE CALCIUM MAINTENANCE FREE</b>															
U1	HPU1LX	350	—	430	19	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Z	
U1R	HPU1RX	350	—	430	19	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Y	
U1 = left front positive; U1R = right front positive (with terminal side of battery to front)															
GROUP NO.	PART NO.	CCA	MINS @ 25A	REF. MCA	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES	
						LENGTH		WIDTH		HEIGHT					
						in	mm	in	mm	in	mm				
<b>DURACELL PREMIUM 12-VOLT MARINE STARTING MAINTENANCE-FREE</b>															
24	HP24M	800	130	1000	44	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	17,22,U	
27	HP27M	840	182	1050	53	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	17,U	
GROUP NO.	PART NO.	CCA	REF. MCA	MINS @ 25A	REF. 20HR	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES
							LENGTH		WIDTH		HEIGHT				
							in	mm	in	mm	in	mm			
<b>DURACELL PREMIUM 12-VOLT MARINE &amp; RV / HEAVY - DUTY DEEP CYCLE SERVICE</b>															
24	HP24DC	525	645	135	75	45.5	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	12,17,35,44,U
27	HP27DC	625	765	180	90	53.5	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	12,17,35,44,U
31	HP31DC	675	830	195	105	60	13	330	6-3/4	171	9-1/2	241	1.5	12	12,17,21,22,35,44,A
GROUP NO.	PART NO.	20 HR CAP.	5 HR CAP.	MINS. DISCHARGED @ 75A	25A	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES
							LENGTH		WIDTH		HEIGHT				
							in	mm	in	mm	in	mm			
<b>DURACELL PREMIUM 6 &amp; 8 VOLT GOLF CAR — EV — MOTIVE POWER / DEEP CYCLE SERVICE</b>															
GC2 (6v)	DGC	215	157	105	395	60.5	10-1/4	260	7-1/8	181	10-7/8	276	1.5	12	11,36,U
GC8 (8v)	HPGC8	165	130	85	318	68	10-1/4	260	7-1/8	181	11-1/8	283	1.5	12	4,11,36,U

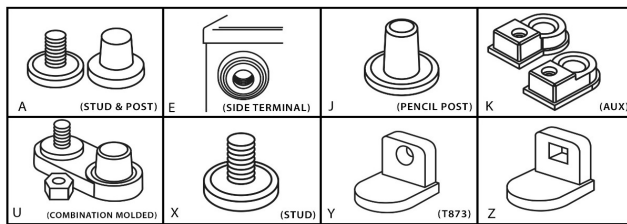

#### TERMINAL DESCRIPTIONS

- |  |   |
|--|---|
| <p>A. Flush combination terminal w/ 5/16"-18 stud and SAE Post, hex nuts included</p> <p>E. Auto Side Terminal</p> <p>J. Pencil Post</p> <p>K. Molded-in top connection terminal (AUX)</p> | <p>U. Molded-in offset SAE post and vertical 5/16" POS. and NEG. stainless steel studs and hex nuts</p> <p>X. 3/8" x 16 stainless steel stud posts</p> <p>Y. Small L terminal with round hole</p> <p>Z. Small L terminal with square hole</p> |
|--|---|

#### BATTERY FOOTNOTES

- |   |   |
|---|---|
| <p>2. Black cover / Gray case</p> <p>4. Gray cover / Gray case</p> <p>11. Low maintenance - low antimony grids</p> <p>12. Hybrid construction</p> <p>17. Includes handle</p> <p>18. Includes top adapter</p> <p>19. Includes lifting ledges</p> <p>21. Anchor locked elements</p> <p>22. Flush manifold vented cover</p> <p>24. CCA listed is an EN rating</p> <p>25. With individual vent caps</p> <p>28. For height with adapter add 5/8" (16mm)</p> <p>33. Fahrenheit Thermal Shielding Technology</p> | <p>35. Deduct 15% from CCA and CA rating to allow for double insulation (glass mat)</p> <p>36. Peak performance capacity</p> <p>38. "Non-spillable" defined by DOT (Department of Transportation) definitions</p> <p>39. "Non-spillable" defined by ICAO (International Civil Aviation Organization) and IATA (International Airline Transport Association) definitions</p> <p>43. Free replacement warranty is 12 months in deep-cycle use and 3 months in full electric vehicle use</p> <p>44. Free replacement warranty is 3 months in full electric vehicle use</p> <p>45. If battery is used in on-highway vehicles equipped with two-way radios such as taxis, police and emergency vehicles, marine applications, off-highway use, and other non-automotive usage, free replacement period will be 6 months and 3 months in full electric vehicle use.</p> <p>46. If battery is used in on-highway vehicles equipped with two-way radios (such as taxis, police, and emergency vehicles), marine applications, off-highway use, and other non-automotive usage, free warranty replacement period will be 18 months, free replacement warranty is 12 months in deep-cycle use and 3 months in full electric vehicle use</p> |
|---|---|

- Batteries are maintenance-free calcium grids, except where noted
- Batteries manufactured in black polypropylene cases & covers, except where noted
- SAE or DIN automotive top posts used, unless noted
- Warranty is suggested months
- Weights are approximates
- CA and MCA rating @ 32°F is an approximation, for comparison only
- Other than CCA and RC, ratings are "nominal"
- CCA and RC ratings conform to B.C.I. specifications

**FOR NATIONWIDE WARRANTY CALL 1-877-344-8971**

**PROPOSITION 65 WARNING:** Battery posts, terminals and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Batteries also contain other chemicals known to the State of California to cause cancer. **WASH HANDS AFTER HANDLING.**