

DURACELL®

January 1, 2024
Supersedes all previous information. Subject to change without notice



LYON STATION, PA - PHONE: 610-682-6361 - Fax: 610-682-4781
WWW.DRIVEDURACELL.COM


Canada

GROUP NO.	PART NO.	CCA	R.C.	REF. CA	20 HR CAP.	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES	
							LENGTH		WIDTH		HEIGHT					
							in	mm	in	mm	in	mm				
DURACELL PLATINUM AGM 12-VOLT AUTO / LTV — 36 MONTH FREE REPLACEMENT — 36 MONTH ROADSIDE ASSISTANCE																
34R	AGM34R	750	120	860	55	42.5	10-3/4	273	6-7/8	175	8	203	1.0	36	2,17,28,38,39,46	
35/85	AGM35/85	640	100	755	50	40	9-9/16	242	6-3/4	171	7-3/4	197	2.0	36	2,17,18,37,38,39,46	
47 (H5/L2)	AGM47	600	100	690	60	39	9-9/16	242	6-7/8	175	7-1/2	190	1.0	36	17,22,38,39,46	
48 (H6/L3)	AGM48	760	120	875	70	47.5	11	278	6-7/8	175	7-1/2	190	1.0	36	17,22,46	
49 (H8/L5)	AGM49	850	170	975	92	58	13-15/16	354	6-7/8	175	7-1/2	190	1.0	36	17,22,38,39,46	
S46B24R (PRIUS)	AGM51P	325	60	390	46	29.5	9-1/4	235	5	127	8-5/8	220	1.0	36	22,38,39,46,J	
51R	AGM51RT	500	75	580	46	31.5	9-5/16	236	5	127	8-5/8	219	1.0	36	2,38,39,46	
65	AGM65	750	150	860	75	47.5	12	305	7-3/8	187	7-5/8	194	2.0	36	2,17,38,39,46	
78	AGM78	750	120	860	55	43	10-3/4	273	6-7/8	175	7-1/4	184	2.0	36	2,17,38,39,46,E	
94R (H7/L4)	AGM94R	800	140	920	80	52	12-7/16	315	6-7/8	175	7-1/2	190	1.0	36	17,22,38,39,46	
95R (H9/L6)	AGM95R	950	190	1050	105	65	15-1/2	394	6-7/8	175	7-1/2	190	1.0	36	17,22,24,38,39,46	
140R (H4/LN1)	AGM140R	535	80	615	50	34	8-1/8	207	6-7/8	175	7-1/2	190	1.0	36	17,22,38,39,46	
DURACELL PLATINUM AGM — 12 MONTH FREE REPLACEMENT																
401	AUX12	180	—	—	—	10	9.5	5-7/8	150	3-7/16	88	5-1/8	130	0.2	12	K
400	AUX14	200	—	—	—	12	11.5	5-7/8	150	3-7/16	88	5-3/4	145	0.2	12	38,39,K
AUX	AUX18L	300	—	—	—	20	18	8-1/8	206	3-9/16	91	6-3/8	163	0.2	12	38,39,K
GROUP NO.	PART NO.	CCA	R.C.	REF. CA	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES		
						LENGTH		WIDTH		HEIGHT						
						in	mm	in	mm	in	mm					
DURACELL PREMIUM 12-VOLT AUTO / LTV — 36 MONTH FREE REPLACEMENT — 36 MONTH ROADSIDE ASSISTANCE																
24	P24	650	115	800	39.5	10-3/4	273	6-3/4	171	9	229	1.0	36	17,22,45		
24F	P24F	725	120	890	42.5	10-3/4	273	6-3/4	171	9	229	1.0	36	17,22,45		
25	P25	625	95	770	37	9-3/4	248	6-7/8	175	8-7/8	225	1.0	36	17,22,45		
26	D26	540	80	665	29	8-3/4	222	6-3/4	171	8	203	1.0	36	17,18,22,37,45		
26R	D26R	540	80	665	29	8-3/4	222	6-3/4	171	8	203	1.0	36	17,18,22,37,45		
27	P27	840	140	1035	50.5	12-5/8	321	6-3/4	171	9	229	1.0	36	17,21,45		
27F	P27F	840	140	1035	50.5	12-5/8	321	6-3/4	171	9	229	1.0	36	17,21,45		
34	P34	800	115	985	40	10-3/4	273	6-7/8	175	8	203	1.0	36	17,18,22,28,45		
35	P35	640	95	785	37	9-9/16	247	6-7/8	175	8-7/8	225	1.0	36	17,22,45		
36R	P36R	650	120	800	38	10-1/4	260	7-1/4	184	8	203	1.0	36	45		
40R (T6/LB3)	P40R	650	105	800	37	11	278	6-7/8	175	6-7/8	175	1.0	36	17,22,45		
47 (H5/L2)	P47	650	100	800	35.5	9-9/16	242	6-7/8	175	7-1/2	190	1.0	36	17,22,45		
48 (H6/L3)	P48	730	120	900	41.5	11	278	6-7/8	175	7-1/2	190	1.0	36	17,22,45		
	D48	680	120	835	40	11	278	6-7/8	175	7-1/2	190	1.0	36	17,22,45		
49 (H8/L5)	P49	900	185	1105	52.5	13-15/16	354	6-7/8	175	7-1/2	190	1.0	36	17,22,45		
51	P51	450	70	555	28	9-3/8	238	5	127	8-3/4	222	1.0	36	22,45		
51R	P51R	500	75	615	28.5	9-3/8	238	5	127	8-3/4	222	1.0	36	22,45		
58	P58	580	85	715	32	10	254	7-1/4	184	6-7/8	178	1.0	36	17,22,45		
58R	P58R	580	85	715	32	10	254	7-1/4	184	6-7/8	175	1.0	36	17,22,45		
59	P59	590	100	725	38.5	9-1/2	241	7-7/16	189	7-1/2	190	1.0	36	17,45		
65	P65	850	150	1045	46.5	12	305	7-3/8	187	7-5/8	194	1.0	36	17,22,45		
75	P75	690	95	850	35	9-3/4	248	7	178	7-1/4	184	1.0	36	17,22,45,E		
78	P78	800	115	985	40	10-3/4	273	6-7/8	175	7-1/4	184	1.0	36	17,22,45,E		
86	P86	690	95	850	35	9	229	6-7/8	175	8-1/8	206	1.0	36	22,45		
90 (T5/LB2)	P90	600	90	740	33.5	9-9/16	242	6-7/8	175	6-7/8	175	1.0	36	17,22,45		
94R (H7/L4)	P94R	790	140	970	45.5	12-7/16	315	6-7/8	175	7-1/2	190	1.0	36	17,22,45		
96R	P96R	600	90	740	32.5	9-9/16	242	6-7/8	175	6-7/8	175	1.0	36	17,22,45		
121R	P121R	550	80	675	30.5	8-1/4	210	6-15/16	177	8-1/8	206	1.0	36	22,45		
124R	P124R	700	100	860	37.5	10-1/4	260	6-7/8	175	8-3/8	212	1.0	36	22,45		
DURACELL PREMIUM 12-VOLT HEAVY-DUTY COMMERCIAL SERVICE																
4D	HP4D	1050	290	1290	97	20-1/2	520	8-5/8	219	9-7/8	251	3.0	12	12,17,21,22		
4DLT	HP4DLT	850	240	1045	78.5	20	508	8-1/8	206	8-1/8	206	2.0	12	12,19,25		
8D	HP8DFT	1425	440	1755	127	20-3/4	527	11	279	10	254	4.0	12	12,17,21,22		
31	D31X	950	175	1170	55.5	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22,X		
	HP31CS	730	190	900	62	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22,43,X		
DURACELL PREMIUM AGM 12-VOLT HEAVY-DUTY COMMERCIAL SERVICE																
31	AGM31F	925	190	1050	66.5	13	330	6-3/4	171	9-1/2	241	1.5	36	2,17,33,38,39,43,X		
DURACELL PREMIUM 12-VOLT LAWN MOWER — GARDEN TRACTOR — SMALL ENGINE CALCIUM MAINTENANCE FREE																
U1	HPU1LX	350	—	430	19	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Z		
	DU1L	230	—	285	15.5	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Z		
U1R	HPU1RX	350	—	430	19	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Y		
U1 = left front positive; U1R = right front positive (with terminal side of battery to front)																
GROUP NO.	PART NO.	CCA	MINS @ 25A	REF. MCA	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES		
						LENGTH		WIDTH		HEIGHT						
						in	mm	in	mm	in	mm					
DURACELL PREMIUM 12-VOLT MARINE STARTING MAINTENANCE-FREE																
24	HP24M	800	130	1000	44	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	17,22,U		
	D24M	550	90	675	37	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	17,22,U		
27	HP27M	840	182	1050	53	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	17,U		
GROUP NO.	PART NO.	CCA	REF. MCA	MINS @ 25A	20HR CAP.	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES	
							LENGTH		WIDTH		HEIGHT					
							in	mm	in	mm	in	mm				
DURACELL PREMIUM AGM 12-VOLT MARINE & RV / DEEP CYCLE SERVICE																
27M	AGM27DC	580	900	185	92	61.5	12-3/4	324	6-3/4	171	9-3/8	238	1.0	18	2,17,38,39,44,U	
31M	AGM31DC	800	1000	210	105	67.5	12-15/16	329	6-3/4	171	9-3/8	238	1.0	18	2,16,17,38,39,44,A	
DURACELL PREMIUM 12-VOLT MARINE & RV / HEAVY - DUTY DEEP CYCLE SERVICE																
24M	HP24DC	525	645	135	75	45.5	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	12,17,35,44,U	
27M	HP27DC	625	765	180	90	53.5	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	12,17,35,44,U	
31M	HP31DC	675	830	195	105	60	13	330	6-3/4	171	9-1/2	241	1.5	12	12,17,21,22,35,44,A	
DURACELL PREMIUM 12-VOLT MARINE & RV / DEEP CYCLE SERVICE																
24M	HP24DP	575	705	130	65	44	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	12,17,44,U	
27M	HP27DP	675	830	175	80	51	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	12,17,44,U	
DURACELL PREMIUM GEL 12 - VOLT HEAVY-DUTY CYCLE SERVICE (HOME HEALTH CARE / MOBILITY)																
U1	GELU1	200	290	47	31.6	23.5	7-3/4	197	5-1/8	130	7-1/4	184	0.5	12	4,34,38,39,44,Y	
22NF	GEL22NF	210	300	82	51	37.5	9	228	5-1/2	140	9-1/4	235	1.0	12	4,34,38,39,44,G	
24	GEL24	335	470	140	73.6	51.5	10-7/8	276	6-3/4	171	9-3/8	238	1.0	12	4,17,34,38,39,44,G	
24	GEL24SS	335	470	140	73.6	51.5	10-1/4	260	6-3/4	171	8-1/4	210	1.0	12	4,34,38,39,44,C	
GROUP NO.	PART NO.	20 HR CAP.	5 HR CAP.	MINS. DISCHARGED @ 75A	25A	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS									


PART NO.	VOLTS	CCA	10 HR CAP.	WEIGHT (lb)	LENGTH		WIDTH		HEIGHT		CORE VALUE	WARRANTY FREE MONTHS	TERMINAL LOCATIONS	FOOTNOTES	
					in	mm	in	mm	in	mm					
DURACELL PREMIUM AGM 12-VOLT POWERSPORTS															
ETX9	12	120	8	7.5	5-7/8	150	3-7/16	88	4-3/16	106	0.2	12	1	38,39,M	
ETX12	12	180	10	10	5-7/8	150	3-7/16	88	5-1/8	130	0.2	12	1	38,39,M	
ETX14	12	220	12	11.5	5-7/8	150	3-7/16	88	5-3/4	145	0.2	12	1	38,39,42,75,M	
ETX14L	12	220	12	11.5	5-7/8	150	3-7/16	88	5-3/4	145	0.2	12	2	38,39,M	
ETX15	12	220	13	11.5	5-1/4	134	3-1/2	90	6-9/16	166	0.2	12	1	38,39,42,76,M	
ETX15L	12	220	13	11.5	5-1/4	134	3-1/2	90	6-9/16	166	0.2	12	2	38,39,M	
ETX16	12	325	19	17	6-7/8	175	4	100	6-1/8	155	0.2	12	1	38,39,42,74,M	
ETX16L	12	325	19	17	6-7/8	175	4	100	6-1/8	155	0.2	12	2	38,39,42,74,M	
ETX18L	12	340	20	18	8-1/8	206	3-9/16	91	6-3/8	163	0.2	12	2	38,39,M	
ETX20L	12	310	17.5	15	7	178	3-1/2	90	6-1/8	155	0.2	12	2	38,39,M	
ETX30LA	12	400	26	21.5	6-5/8	168	5-3/16	131	6-15/16	176	0.2	12	2	38,39,42,78,M	
DURACELL 6 & 12 VOLT - SEALED LEAD ACID AGM															
PART NO.	VOLTS	5 HR CAP.	10 HR CAP.	20 HR CAP.	WEIGHT (lb)	LENGTH		WIDTH		HEIGHT		CORE VALUE	WARRANTY FREE MONTHS	TERMINAL LOCATIONS	FOOTNOTES
						in	mm	in	mm	in	mm				
DUR6V-4	6	3.80	4.28	4	1.8	2.76	70	1.85	47	4.17	106	0.2	12	3	38,39,F1
DUR6V-7	6	5.95	6.65	7	2.6	5.94	151	1.34	34	3.94	100	0.2	12	1	38,39,F1
DUR6V-12	6	10.20	11.40	12	4.1	5.94	151	1.97	50	3.90	99	0.2	12	1	38,39,F1
DUR12V-1.2	12	1.02	1.14	1.2	1.2	3.82	97	1.69	43	2.32	59	0.2	12	5	38,39,F1
DUR12V-2SLM	12	1.70	1.90	2	1.6	5.91	150	0.79	20	3.54	90	0.2	12	4	38,39,F1
DUR12V-2.2	12	1.79	2.00	2.1	1.6	7.17	182	0.91	23	2.4	61	0.2	12	6	38,39,F13
DUR12V-2.3V	12	1.96	2.19	2.3	2.3	7.01	178	1.34	34	2.6	60	0.2	12	1	38,39,F1
DUR12V-2.9	12	2.47	2.76	2.9	2.6	3.11	79	2.2	56	4.21	107	0.2	12	2	38,39,F1
DUR12V-3.4	12	2.55	2.85	3	2.9	5.28	134	2.64	67	2.58	65.5	0.2	12	5	38,39,F1
DUR12V-4.5	12	3.80	4.28	4.5	3.6	3.54	90	2.76	70	4.21	107	0.2	12	1	38,39,F1
DUR12V-5	12	4.25	4.75	5	4.2	3.54	90	2.76	70	4.21	107	0.2	12	1	38,39,F1
DUR12V-5 T2	12	4.25	4.75	5	4.2	3.54	90	2.76	70	4.21	107	0.2	12	1	38,39,F2
DUR12V-7.2	12	6.12	6.84	7.2	5.3	5.94	151	2.56	65	4.02	102	0.2	12	4	38,39,F1
DUR12V-7.2 T2	12	6.12	6.84	7.2	5.3	5.94	151	2.56	65	4.02	102	0.2	12	4	38,39,F1
DUR12V-9	12	7.65	8.55	9	6.0	5.94	151	2.56	65	4.02	102	0.2	12	4	38,39,F2
DUR12V-10	12	8.50	9.50	10	7.3	5.94	151	2.56	65	4.67	118.5	0.2	12	4	38,39,F2
DUR12V-12	12	10.20	11.40	12	8.9	5.94	151	3.86	98	3.86	98	0.2	12	4	38,39,F2
DUR12V-18	12	15.30	17.10	18	12.9	7.13	181	2.99	76	6.57	167	0.2	12	2	38,39,F2
DUR12V-20	12	17.00	19.00	20	13.1	7.13	181	2.99	76	6.57	167	0.2	12	2	38,39,F3
DUR12V-26	12	22.10	24.70	26	17.6	6.54	166	6.89	175	4.92	125	0.5	12	2	38,39,F3
DUR12V-33	12	28.05	31.35	33	21.8	7.72	196	5.12	130	7.09	180	0.5	12	1	38,39,F4
DUR12V-45	12	38.25	42.75	45	32.0	7.83	199	6.54	166	6.73	171	1.0	12	2	38,39,F4
DUR12V-50	12	42.50	47.50	50	33.3	7.83	199	6.54	166	6.73	171	1.0	12	2	38,39,F8

TERMINAL ILLUSTRATIONS, TERMINAL DESCRIPTIONS AND BATTERY FOOTNOTES ON NEXT PAGE

TERMINAL ILLUSTRATIONS

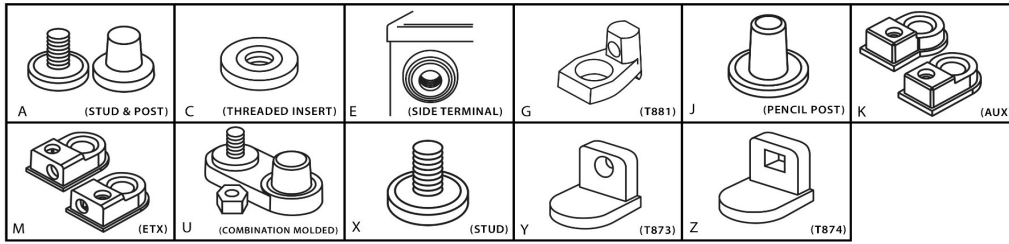

TERMINAL LOCATIONS

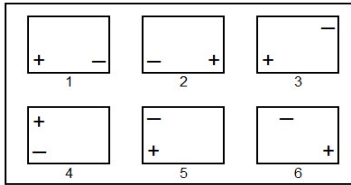

- Batteries are maintenance-free calcium grids, except where noted
- Batteries manufactured in black polypropylene cases & covers, except where noted
- SAE or DIN automotive top posts used, unless noted
- Warranty is suggested months
- Weights are approximates
- CA and MCA rating @ 32°F is an approximation, for comparison only
- Other than CCA and RC, ratings are "nominal"
- CCA and RC ratings conform to B.C.I. specifications

TERMINAL DESCRIPTIONS

- | | |
|--|--|
| A. Flush combination terminal w/ 5/16"-18 stud and SAE Post, hex nuts included | Y. Small L terminal with round hole |
| C. 1/4"- 20 Copper Threaded Insert Terminal | Z. Small L terminal with square hole |
| E. Auto Side Terminal | F1. Faston Tab No. 187 |
| G. Offset post w/ horizontal hole, stainless steel 5/16" bolt and hex nut (T881) | F2. Faston Tab No. 250 |
| J. Pencil Post | F3. Flat, Small Flag, Small Round Hole |
| K. Molded-in top connection terminal (AUX) | F4. Flat, Large Flag, Large Hole |
| U. Molded-in offset SAE post and vertical 5/16" POS. and NEG. Stainless steel studs and hex nuts | F8. Threaded Insert for M6 Bolt |
| X. 3/8" x 16 stainless steel stud posts | F13. Flat Tab |

BATTERY FOOTNOTES

- | | |
|---|--|
| 2. Black cover / Gray case | 35. Deduct 15% from CCA and CA rating to allow for double insulation (glass mat) |
| 4. Gray cover / Gray case | 36. Peak performance capacity |
| 11. Low maintenance - low antimony grids | 37. For height with adaptor add 7/8" (22mm) |
| 12. Hybrid construction | 38. "Non-spillable" defined by DOT (Department of Transportation) definitions |
| 16. Dual terminal, universal design | 39. "Non-spillable" defined by ICAO (International Civil Aviation Organization) and IATA (International Airline Transport Association) definitions |
| 17. Includes handle | 42. Height without adaptor |
| 18. Includes top adaptor | 43. Free replacement warranty is 12 months in deep-cycle use and 3 months in full electric vehicle use |
| 19. Includes lifting ledges | 44. Free replacement warranty is 3 months in full electric vehicle use |
| 21. Anchor locked elements | 45. If battery is used in on-highway vehicles equipped with two-way radios such as taxis, police and emergency vehicles, marine applications, off-highway use, and other non-automotive usage, free replacement period will be 6 months and 3 months in full electric vehicle use. |
| 22. Flush manifold vented cover | 46. If battery is used in on-highway vehicles equipped with two-way radios (such as taxis, police, and emergency vehicles), marine applications, off-highway use, and other non-automotive usage, free warranty replacement period will be 18 months, free replacement warranty is 12 months in deep-cycle use and 3 months in full electric vehicle use |
| 24. CCA listed is an EN rating | 74. Shipped with 20mm height adaptor |
| 25. With individual vent caps | 75. Shipped with two 17mm height adaptors |
| 28. For height with adaptor add 5/8" (16mm) | 76. Shipped with 10mm height adaptor |
| 33. Fahrenheit Thermal Shielding Technology | 78. Shipped with 22mm height adaptor |
| 34. Ratings after 15 cycles | |

FOR NATIONWIDE WARRANTY CALL 1-877-344-8971

PROPOSITION 65 WARNING: Battery posts, terminals and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Batteries also contain other chemicals known to the State of California to cause cancer. **WASH HANDS AFTER HANDLING.**

E.P.M. Form No. 2733 © 2024 Rev 2/13/24 by EPM Printed in U.S.A.
 No part of this document may be copied or reproduced, electronically or mechanically, without written permission from the company.

