



Effective September 1, 2022

Supersedes all previous information. Subject to change without notice




LYON STATION, PA - PHONE: 610-682-6361 - Fax: 610-682-4781

WWW.DRIVEDURACELL.COM

GROUP NO.	PART NO.	CCA	R.C.	REF. CA	20 HR CAP.	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES
							LENGTH		WIDTH		HEIGHT				
							in	mm	in	mm	in	mm			
12-VOLT AUTO / LTV — AGM VALVE REGULATED — 36 MONTH FREE REPLACEMENT — 36 MONTH ROADSIDE ASSISTANCE															
24F	AGM24F	710	110	825	65	44.5	11-1/8	282	6-5/8	168	9	229	1.0	36	2,17,38,39,46
34	AGM34	750	120	860	55	42.5	10-3/4	273	6-7/8	175	8	203	1.0	36	2,17,28,38,39,46
34R	AGM34R	750	120	860	55	42.5	10-3/4	273	6-7/8	175	8	203	1.0	36	2,17,28,38,39,46
35/85	AGM35/85	640	100	755	50	40	9-9/16	242	6-3/4	171	7-3/4	197	1.0	36	2,17,18,37,38,39,46
47 (H5/L2)	AGM47	600	100	690	60	39	9-9/16	242	6-7/8	175	7-1/2	190	1.0	36	17,22,38,39,46
48 (H6/L3)	AGM48	760	120	875	70	47.5	11	278	6-7/8	175	7-1/2	190	1.0	36	17,22,46
49 (H8/L5)	AGM49	850	170	975	92	58	13-15/16	354	6-7/8	175	7-1/2	190	1.0	36	17,22,38,39,46
51R	AGM51R	500	75	580	46	31.5	9-5/16	236	5	127	8-5/8	219	1.0	36	2,38,39,46
65	AGM65	750	150	860	75	47.5	12	305	7-3/8	187	7-5/8	194	1.0	36	2,17,38,39,46
78	AGM78	750	120	860	55	43	10-3/4	273	6-7/8	175	7-1/4	184	1.0	36	2,17,38,39,46,E
94R (H7/L4)	AGM94R	800	140	920	80	52	12-7/16	315	6-7/8	175	7-1/2	190	1.0	36	17,22,38,39,46
95R (H9/L6)	AGM95R	950	190	1050	105	65	15-1/2	394	6-7/8	175	7-1/2	190	1.0	36	17,22,24,38,39,46
75/86	AGM75DT	640	100	755	50	41	9-9/16	242	7-1/16	179	7-15/16	202	1.0	36	2,16,17,18,22,37,38,39,46,P
34/78	AGM78DT	750	120	860	55	43	10-3/4	273	6-7/8	175	8	203	1.0	36	2,16,17,38,39,46,P
12-VOLT AUTO / LTV — AGM VALVE REGULATED — 24 MONTH FREE REPLACEMENT															
46A24L (MIATA)	AGMU1P	320	45	400	—	24	7-3/4	197	5-1/8	130	7-1/8	181	0.5	24	2,13,38,39,45
546B24R (PRIUS)	AGM51P	325	60	390	46	29.5	9-1/4	235	5	127	8-5/8	220	1.0	24	22,38,39,46,J
GROUP NO.	PART NO.	CCA	R.C.	REF. CA	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES	
						LENGTH		WIDTH		HEIGHT					
						in	mm	in	mm	in	mm				
12-VOLT AUTO / LTV — EHP TECHNOLOGY — 36 MONTH FREE REPLACEMENT — 36 MONTH ROADSIDE ASSISTANCE															
24F	EHP24F	725	120	890	42.5	42.5	10-3/4	273	6-3/4	171	9	229	1.0	36	17,22,45
34	EHP34	800	115	985	40	40	10-3/4	273	6-7/8	175	8	203	1.0	36	17,18,22,28,45
35	EHP35	640	95	785	37	37	9-9/16	247	6-7/8	175	8-7/8	225	1.0	36	17,22,45
48 (H6/L3)	EHP48	730	120	900	41.5	41.5	11	278	6-7/8	175	7-1/2	190	1.0	36	17,22,45
65	EHP65	750	140	925	44	44	12	305	7-3/8	187	7-5/8	194	1.0	36	17,22,45
75	EHP75	690	95	850	35	35	9-3/4	248	7	178	7-1/4	184	1.0	36	17,22,45,E
78	EHP78	800	115	985	40	40	10-3/4	273	6-7/8	175	7-1/4	184	1.0	36	17,22,45,E
12-VOLT AUTO / LTV — HP TECHNOLOGY — 24 MONTH FREE REPLACEMENT															
24	HP24	650	115	800	39.5	39.5	10-3/4	273	6-3/4	171	9	229	1.0	24	17,22,45
24F	HP24F	650	115	800	39.5	39.5	10-3/4	273	6-3/4	171	9	229	1.0	24	17,22,45
27	HP27	710	120	875	49	49	12	305	6-3/4	171	9	229	1.0	24	45
27F	HP27F	710	120	875	49	49	12-3/8	314	6-3/4	171	9	229	1.0	24	45
34	HP34	690	110	850	37.5	37.5	10-3/4	273	6-7/8	175	8	203	1.0	24	17,18,22,28,45
34R	HP34R	690	110	850	37.5	37.5	10-3/4	273	6-7/8	175	8	203	1.0	24	17,18,22,28,45
36R	HP36R	650	120	800	38	38	10-1/4	260	7-1/4	184	8	203	1.0	24	45
40R (T6/LB3)	HP40R	650	105	800	37	37	11	278	6-7/8	175	6-7/8	175	1.0	24	17,22,45
47 (H5/L2)	HP47	650	100	800	35.5	35.5	9-9/16	242	6-7/8	175	7-1/2	190	1.0	24	17,22,45
48 (H6/L3)	HP48	680	120	835	40	40	11	278	6-7/8	175	7-1/2	190	1.0	24	17,22,45
148	HP48R	680	120	835	40	40	11	278	6-7/8	175	7-1/2	190	1.0	24	17,22,45
49 (H8/L5)	HP49	900	185	1105	52.5	52.5	13-15/16	354	6-7/8	175	7-1/2	190	1.0	24	17,22,45
51R	HP51R	500	75	615	28.5	28.5	9-3/8	238	5	127	8-3/4	222	1.0	24	22,45
59	HP59	590	100	725	38.5	38.5	9-1/2	241	7-7/16	189	7-1/2	190	1.0	24	17,45
65	HP65	850	150	1045	46.5	46.5	12	305	7-3/8	187	7-5/8	194	1.0	24	17,22,45
75	HP75	650	90	800	34	34	9-3/4	248	7	178	7-1/4	184	1.0	24	17,22,45,E
78	HP78	690	110	850	37.5	37.5	10-3/4	273	6-7/8	175	7-1/4	184	1.0	24	17,22,45,E
79	HP79	840	140	1035	43	43	12-1/16	307	7-1/16	179	7-3/8	188	1.0	24	22,45,E
85	HP85	650	110	800	34	34	9	229	6-7/8	175	8-1/8	206	1.0	24	22,45
86	HP86	690	95	850	35	35	9	229	6-7/8	175	8-1/8	206	1.0	24	22,45
90 (T5/LB2)	HP90	600	90	740	33.5	33.5	9-9/16	242	6-7/8	175	6-7/8	175	1.0	24	17,22,45
91 (T6/LB3)	HP91	700	100	860	37	37	11	278	6-7/8	175	6-7/8	175	1.0	24	17,22,45
93 (T8/LB5)	HP93	800	130	985	46	46	13-15/16	354	6-7/8	175	6-7/8	175	1.0	24	17,22,45
94R (H7/L4)	HP94R	790	140	970	45.5	45.5	12-7/16	315	6-7/8	175	7-1/2	190	1.0	24	17,22,45
95R (H9/L6)	HP95R	850	190	1045	61.5	61.5	15-1/2	394	6-7/8	175	7-1/2	190	1.0	24	17,22,45
96R	HP96R	600	90	740	32.5	32.5	9-9/16	242	6-7/8	175	6-7/8	175	1.0	24	17,22,45
101	HP101	650	110	800	36	36	10-1/4	260	7-1/16	179	6-11/16	170	1.0	24	22,45,E
124	HP124	700	100	860	37.5	37.5	10-1/4	260	6-7/8	175	8-3/8	212	1.0	24	22,45
124R	HP124R	700	100	860	37.5	37.5	10-1/4	260	6-7/8	175	8-3/8	212	1.0	24	22,45
75/86	HP75DT	690	95	850	35.5	35.5	9-3/4	248	7	178	8-1/8	206	1.0	24	14,16,17,18,22,37,45,P
34/78	HP78DT	800	115	985	40.5	40.5	10-3/4	273	6-7/8	175	8	203	1.0	24	14,16,17,18,22,28,45,P
12-VOLT AUTO / LTV — 18 MONTH FREE REPLACEMENT															
24	D24	550	90	675	37	37	10-3/4	273	6-3/4	171	9	229	1.0	18	17,22,45
24F	D24F	550	90	675	37	37	10-3/4	273	6-3/4	171	9	229	1.0	18	17,22,45
25	D25	550	90	675	34	34	9-3/4	248	6-7/8	175	8-7/8	225	1.0	18	17,22,45
26	D26	540	80	665	29	29	8-3/4	222	6-3/4	171	8	203	1.0	18	17,18,22,37,45
26R	D26R	540	80	665	29	29	8-3/4	222	6-3/4	171	8	203	1.0	18	17,18,22,37,45
34	D34	600	90	740	34	34	10-3/4	273	6-7/8	175	8	203	1.0	18	17,18,22,28,45
35	D35	550	90	675	34	34	9-9/16	247	6-7/8	175	8-7/8	225	1.0	18	17,22,45
41	D41	650	100	800	38	38	11-9/16	293	6-7/8	175	6-7/8	175	1.0	18	22
51	D51	450	70	555	28	28	9-3/8	238	5	127	8-3/4	222	1.0	18	22,45
51R	D51R	450	70	555	28	28	9-3/8	238	5	127	8-3/4	222	1.0	18	22,45
58	D58	580	85	715	32	32	10	254	7-1/4	184	6-7/8	178	1.0	18	17,22,45
58R	D58R	580	85	715	32	32	10	254	7-1/4	184	6-7/8	175	1.0	18	17,22,45
65	D65	675	130	830	41.5	41.5	12	305	7-3/8	187	7-5/8	194	1.0	18	17,22,45
75	D75	540	85	665	31.5	31.5	9-3/4	248	7	178	7-1/4	184	1.0	18	17,22,45,E
86	D86	540	85	665	31.5	31.5	9	229	6-7/8	175	8-1/8	206	1.0	18	22,45
121R	D121R	550	80	675	30.5	30.5	8-1/4	210	6-15/16	177	8-1/8	206	1.0	18	22,45
75/86	D75DT	650	90	800	34.5										

GROUP NO.	PART NO.	CCA	R.C.	REF. CA	WEIGHT (lb)	MAXIMUM OVERALL DIMENSIONS						CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES		
						LENGTH		WIDTH		HEIGHT						
						in	mm	in	mm	in	mm					
12-VOLT HEAVY-DUTY COMMERCIAL SERVICE																
4D	HP4D	1050	290	1290	97	20-1/2	520	8-5/8	219	9-7/8	251	3.0	12	12,17,21,22		
4DLT	HP4DLT	850	240	1045	78.5	20	508	8-1/8	206	8-1/8	206	2.0	12	12,19,25		
8D	HP8DFT	1425	440	1755	127	20-3/4	527	11	279	10	254	4.0	12	12,17,21,22		
30H	D30H	650	150	800	51	13	330	6-3/4	171	9-1/2	241	1.5	12	19,21,22		
31	HP31	1000	185	1230	58	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22,X		
	D31X	950	175	1170	55.5	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22,X		
	D31	760	170	935	52.5	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22,X		
31P	HP31P	1000	185	1230	58	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22		
	D31PX	950	175	1170	55.5	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22		
	D31P	760	170	935	52.5	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22		
12-VOLT HEAVY-DUTY COMMERCIAL SEVERE SERVICE / DUAL PURPOSE																
31	HP31CS	730	190	900	62	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22,43,X		
	D31CS	700	185	860	58.5	13	330	6-3/4	171	9-1/2	241	1.5	18	17,19,21,22,43,X		
12-VOLT HEAVY-DUTY COMMERCIAL — AGM VALVE REGULATED																
31	AGM31	925	190	1050	66.5	13	330	6-3/4	171	9-1/2	241	1.5	24	2,17,38,39,43,X		
	AGM31CS	800	200	1000	67.5	13	330	6-3/4	171	9-1/2	241	1.5	18	2,17,38,39,43,X		
31P	AGM31P	925	190	1050	66.5	13	330	6-3/4	171	9-1/2	241	1.5	24	2,17,38,39,43		
12-VOLT LAWN MOWER — GARDEN TRACTOR — SMALL ENGINE CALCIUM MAINTENANCE FREE																
U1	HPU1LX	350	—	430	19	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Z		
	HPU1L	300	—	370	17	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Z		
	DU1L	230	—	285	15.5	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Z		
U1R	HPU1RX	350	—	430	19	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Y		
	HPU1R	300	—	370	17	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Y		
	DU1R	230	—	285	15.5	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6	22,Y		
U1 = left front positive; U1R = right front positive (with terminal side of battery to front)																
22NF	D22NF	360	58	445	29	9-3/8	238	5-1/2	140	9	229	0.5	6	12		
GROUP NO.	PART NO.	CCA	MINS @ 25A	REF. MCA	WEIGHT (lb)	LENGTH		WIDTH		HEIGHT		CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES		
						in	mm	in	mm	in	mm					
						12-VOLT MARINE / RV STARTING CALCIUM MAINTENANCE-FREE										
24	HP24M	800	130	1000	44	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	17,22,U		
	D24M	550	90	675	37	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	17,22,U		
27	HP27M	840	182	1050	53	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	17,U		
GROUP NO.	PART NO.	CCA	REF. MCA	MINS @ 25A	REF. 20HR CAP.	WEIGHT (lb)	LENGTH		WIDTH		HEIGHT		CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES	
							in	mm	in	mm	in	mm				
							12-VOLT MARINE / RV DUAL PURPOSE STARTING / CYCLE SERVICE									
24	HP24DP	550	675	130	65	44	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	12,17,44,U	
	HP27DP	650	800	175	80	51	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	12,17,44,U	
31	HP31DP	700	860	190	100	58.5	13	330	6-3/4	171	9-1/2	241	1.5	12	17,21,22,44,A	
12-VOLT MARINE / RV DEEP CYCLE SERVICE																
24	HP24DC	500	615	130	75	45.5	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12	12,17,35,44,U	
	HP27DC	575	705	175	90	53.5	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12	12,17,35,44,U	
31	HP31DC	650	800	190	105	60	13	330	6-3/4	171	9-1/2	241	1.5	12	12,17,21,22,35,44,A	
GROUP NO.	PART NO.	20 HR CAP.	6 HR CAP.	MINS @ 75 A	WEIGHT (lb)	LENGTH		WIDTH		HEIGHT		CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES		
						in	mm	in	mm	in	mm					
						6-VOLT FLOOR SCRUBBER AND SWEEPER										
901	HP901	250	210	130	73	11-3/4	298	7	178	11-1/2	292	1.5	6	11,17,19,25,34,V		
	D901	235	190	120	67.5	11-3/4	298	7	178	11-1/2	292	1.5	6	11,17,19,25,34,V		
902	HP902	330	270	170	97.5	11-3/4	298	7	178	14-3/8	365	2.0	6	11,17,19,25,34,V		
903	HP903	370	295	190	111	11-3/4	298	7	178	16-1/2	419	2.5	6	11,17,19,25,34,W		
12-VOLT FLOOR SCRUBBER AND SWEEPER																
921	HP921	228	180	115	127	15-1/2	394	7	178	14-1/4	362	3.0	6	11,17,25,34,V		
	D921	195	160	90	116	15-1/2	394	7	178	14-1/4	362	3.0	6	11,17,25,34,V		
GROUP NO.	PART NO.	20 HR CAP.	5 HR CAP.	MINS. DISCHARGED @ 75A	MINS. @ 25A	WEIGHT (lb)	LENGTH		WIDTH		HEIGHT		CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES	
							in	mm	in	mm	in	mm				
							6, 8 VOLT GOLF CAR — EV — MOTIVE POWER / DEEP CYCLE SERVICE									
GC2 (6V)	HPGCX	235	188	132	—	488	68	10-1/4	260	7-1/8	181	10-7/8	276	1.5	12	4,11,36,U
	HPGC	230	174	120	—	448	64	10-1/4	260	7-1/8	181	10-7/8	276	1.5	12	4,11,36,U
	DGC	215	157	105	—	395	60.5	10-1/4	260	7-1/8	181	10-7/8	276	1.5	12	11,36,U
GC2H (6V)	HPGCH	255	203	145	—	530	77	10-1/4	260	7-1/8	181	11-7/8	302	1.5	12	4,11,36,U
	HPGC8	165	130	85	121	318	68	10-1/4	260	7-1/8	181	11-1/8	283	1.5	12	4,11,36,U
GROUP NO.	PART NO.	CCA	REF. MCA	R.C.	MINS @ 25A	20 HR CAP.	WEIGHT (lb)	LENGTH		WIDTH		HEIGHT		CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES
								in	mm	in	mm	in	mm			
								6, 12 VOLT MARINE / RV — GOLF CAR — EV — AGM VALVE REGULATED								
U1	AGMU1	200	240	45	54	32	23	8-5/16	211	5-1/8	130	7-1/4	184	0.5	6	2,17,38,39,44,Y
	AGM22NF	350	420	85	95	55	37	9	228	5-1/2	140	9-1/4	235	0.5	12	2,38,39,44,G
24M	AGM24DC	525	800	135	145	79	52	10-7/8	276	6-3/4	171	9-3/8	238	1.0	12	2,17,38,39,44,U
27M	AGM27DC	580	900	175	185	92	61.5	12-3/4	324	6-3/4	171	9-3/8	238	1.0	12	2,17,38,39,44,U
31M	AGM31DC	800	1000	200	210	105	67.5	12-15/16	329	6-3/4	171	9-3/8	238	1.5	12	2,16,17,38,39,44,A
34M	AGM34M	750	860	120	120	55	42.5	10-3/4	273	6-7/8	175	8-3/8	212	1.0	24	2,17,38,39,43,U
4D	AGM4D	1110	1420	380	413	198	133.5	20-3/4	527	8-1/2	216	10	254	3.0	12	2,17,44
8D	AGM8D	1450	1800	480	517	245	163	20-3/4	527	11	279	10	254	4.0	12	2,17,44
GC2 (6V)	AGMGC2	680	900	380	409	190	68	10-1/4	260	7-1/8	181	10-7/8	276	1.5	12	2,44,U
12-VOLT HEAVY-DUTY CYCLE SERVICE — GEL VALVE REGULATED																
U1	GELU1	200	290	44	47	31.6	23.5	7-3/4	197	5-1/8	130	7-1/4	184	0.5	12	4,34,38,39,Y
22NF	GEL22NF	210	300	77	82	51	37.5	9	228	5-1/2	140	9-1/4	235	1.0	12	4,34,38,39,G
24	GEL24	335	470	132	140	73.6	51.5	10-7/8	276	6-3/4	171	9-3/8	238	1.0	12	4,17,34,38,39,G
24	GEL24SS	335	470	132	140	73.6	51.5	10-1/4	260	6-3/4	171	8-1/4	210	1.0	12	4,34,38,39,C

GROUP NO.	PART NO.	PERFORMANCE LEVEL		WEIGHT (lb)	LENGTH		WIDTH		HEIGHT		CORE VALUE	WARRANTY FREE MONTHS	FOOTNOTES	
		CCA	10 HR CAP.		in	mm	in	mm	in	mm				
12 - VOLT POWER SPORTS AGM VALVE REGULATED														
-	ET4L	50	3	3.3	4-7/16	113	2-3/4	70	3-7/16	87	0.2	6	2,13,38,39,ZZ	
-	ET5L	75	4	4.4	4-7/16	113	2-3/4	70	4-1/8	105	0.2	6	2,13,38,39,ZZ	
	BTX9	120	8	7.5	5-7/8	150	3-7/16	88	4-3/16	106	0.2	12	38,39,M	
	BTX12	180	10	10	5-7/8	150	3-7/16	88	5-1/8	130	0.2	12	38,39,M	
	BTX14	220	12	11.5	5-7/8	150	3-7/16	88	5-3/4	145	0.2	12	38,39,42,75,M	
	BTX14L	220	12	11.5	5-7/8	150	3-7/16	88	5-3/4	145	0.2	12	38,39,M	
	BTX14AH	220	13	11.5	5-1/4	134	3-1/2	90	6-9/16	166	0.2	12	38,39,42,76,M	
	BTX14AHL	220	13	11.5	5-1/4	134	3-1/2	90	6-9/16	166	0.2	12	38,39,M	
	B16	325	19	17	6-7/8	175	4	100	6-1/8	155	0.2	12	38,39,42,74,M	
	B16L	325	19	17	6-7/8	175	4	100	6-1/8	155	0.2	12	38,39,42,74,M	
	BTX24HL	ETX18L	340	20	18	8-1/8	206	3-9/16	91	6-3/8	163	0.2	12	38,39,M
	BTX20L	ETX20L	310	17.5	15	7	178	3-1/2	90	6-1/8	155	0.2	12	38,39,M
	BTX30L	ETX30LA	400	26	21.5	6-5/8	168	5-3/16	131	7-3/4	197	0.2	12	18,38,39,42,78,M

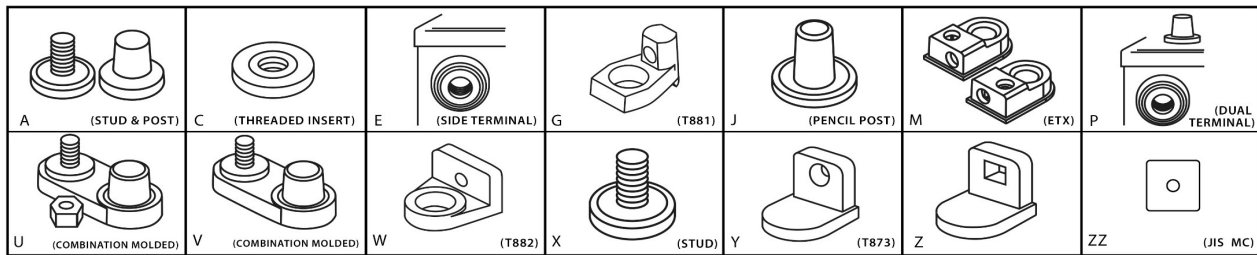

TERMINAL DESCRIPTIONS

- A. Flush combination terminal w/ 5/16" stud and SAE Post, hex nuts included
- C. 1/4"- 20 Copper Threaded Insert Terminal
- E. Auto Side Terminal
- G. Offset post w/ horizontal hole, stainless steel 5/16" bolt and hex nut (T881)
- J. Pencil Post
- M. Molded-in top and side connection Terminal (ETX)
- P. Dual terminal, automotive top and side
- U. Molded-in offset SAE post and vertical 5/16" POS. and NEG. stainless steel studs and hex nuts
- V. Molded-in offset SAE post and vertical 5/16" NEG., 5/16" POS. and NEG. stainless steel studs
- W. "L" type terminal with 5/16" diameter hole (T882)
- X. 3/8" x 16 stainless steel stud posts
- Y. Small L terminal with round hole
- Z. Small L terminal with square hole
- ZZ. JIS Power Sports

BATTERY FOOTNOTES

- 2. Black cover / Gray case
- 4. Gray cover / Gray case
- 11. Low maintenance - low antimony grids
- 12. Hybrid construction
- 13. Absorbed Glass Mat technology (AGM)
- 14. Centerline terminal posts
- 16. Dual terminal universal design
- 17. Includes handle
- 18. Includes top adapter
- 19. Includes lifting ledges
- 21. Anchor locked elements
- 22. Flush manifold vented cover
- 24. CCA listed is an EN rating
- 25. With individual vent caps
- 28. For height with adapter add 5/8" (16mm)
- 34. Ratings after 15 cycles
- 35. Deduct 15% from CCA and CA rating shown to allow for double insulation (glass mat)
- 36. Peak performance capacity
- 37. For height with adapter add 7/8" (22mm)
- 38. "Non-spillable" defined by DOT (Department of Transportation) definitions
- 39. "Non-spillable" defined by ICAO (International Civil Aviation Organization) and IATA (International Airline Transport Association) definitions
- 42. Height without adapter
- 43. Free replacement warranty is 12 months in deep-cycle use and 3 months in full electric vehicle use
- 44. Free replacement warranty is 3 months in full electric vehicle use
- 45. If battery is used in on-highway vehicles equipped with two-way radios (such as taxis, police, and emergency vehicles), marine applications, off-highway use,
- 46. If battery is used in on-highway vehicles equipped with two-way radios (such as taxis, police, and emergency vehicles), marine applications, off-highway use, and other non-automotive usage, free warranty replacement period will be 18 months, free replacement warranty is 12 months in deep-cycle use and 3 months in full electric vehicle use
- 74. Shipped with 20mm adapter
- 75. Shipped with two (2) 17mm adapters
- 76. Shipped with 10mm adapter
- 78. Shipped with 22mm height adapter

- Batteries are maintenance-free calcium grids, except where noted
- Batteries manufactured in black polypropylene cases & covers, except where noted
- SAE or DIN automotive top posts used, unless noted
- Warranty is suggested months
- Weights are approximates
- CA and MCA rating @ 32°F are approximations, for comparison only
- Ratings other than CCA and RC are "nominal"
- CCA and RC ratings conform to B.C.I. specifications

FOR NATIONWIDE WARRANTY CALL 1-877-344-8971

PROPOSITION 65 WARNING: Battery posts, terminals and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Batteries also contain other chemicals known to the State of California to cause cancer. **WASH HANDS AFTER HANDLING.**